

Pickio Pallet Picker

A single vehicle can handle tasks from flat picking to stacking into a truck.

Easy

Pickio makes it easy for anyone to perform a series of tasks from picking to loading of cargo.



Smooth Start

Adoption of large capacity AC motor and electronic control technology makes it easy to start, run, and stop the vehicle.




Bike Handle

The bike handle is same operation feeling as a bicycle or a motorbike.

Safety & Compact

Pickio is a compact specification which provides a driver's cockpit. It enables easy handling, reduces labor, and helps prevent pinching accidents.

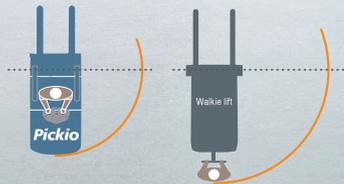

Long Time Long Life

Pickio adopts the same large capacity battery of forklift. The battery offers max. 9 hours operation time*1. Under normal usage, it has a service life of about 4 years*2.

*1 Operation rate 55%, discharge rate 75%, as obtained from result of Sumitomo experiment based on JIS D6202.
*2 Based on number of charge/discharge cycles in 7.5 hours of operation.



Lifting up by 60 cm.
Leveling is possible up to the height of loads.
Both single-sided and double-sided pallets can be handled.



This pallet picker can play an active role at flat picking sites. As a self-propelled and ride-on vehicle, the picker can level to the height of cargo, thus promising to dramatically reduce labor at picking sites.

A series of tasks can be easily performed by a single operator.



High Mast



The high-mast specification enables it lifting up to about 1.5 m. Loading into a truck can be done by a single vehicle.

Pallet Picker


Major factors specification

				71-ERP06SI		71-ERP09SI	
				Standard	High-mast specification	Standard	High-mast specification
Performance	Max. load capacity	kg	600		900		
	STD. load center	mm	400		400		
	Maximum lifting height (fork)	mm	A	665	1,480	665	1,480
	Lifting speed (no load/load)	mm/sec	210/110		210/90		
	Travel speed (forward/reverse)	Unladen	km/h	6/2		6/2	
		Laden	km/h	6/2		6/2	
	Minimum turning radius (outer)	mm	C	1,305	1,400	1,400	
	Minimum right angle aisle width (1,100 x 1,100 pallet)	mm	1,640		1,640		
	Right angle stacking aisle width (1,100 x 1,100 pallet)	mm	2,715		2,810		
	Overall length (with fork)	mm	D	2,270	2,365	2,365	
Main dimensions	Overall width	mm	E	796		796	
	Overall height (maximum lifting height)	mm	F	1330 (handle)	2,080	1330 (handle)	2,080
	Overall height (mast lowered)	mm	G	1330 (handle)	1990 (mast)	1330 (handle)	1990 (mast)
	Fork length	mm	H	770		770	
	Fork width	mm	I	100		100	
	Fork spread width (maximum/minimum)	mm	J/K	600/212		600/212	
	Wheelbase	mm	L	1,100		1,100	
	Tread (front/rear)	mm	M/N	None/695		None/695	
	Minimum fork height	mm	O	35		35	
	Minimum ground clearance (center of vehicle body)	mm	P	75		75	
	Floor height	mm	Q	200		200	
	Vehicle weight	kg		1,010	1,245	1,210	1,245
	Tire	Front wheels (drive wheels)		Ø254×90 Urethane		Ø254×90 Urethane	
		Rear wheels		Ø254×102 Urethane		Ø254×102 Urethane	
	Electrical components	Traveling output	kW	2.6		2.6	
Cargo handling output		kW	2.0		2.0		
Steering output		kW	0.3		0.3		
Charger (stationary type)		Input		3-phase/200-230 V		3-phase/200-230 V	
	Transformer capacity	kVA	2.1		2.1		
Battery	Voltage capacity	Standard battery	V/Ah (5HR)		24/201		
	Weight	Standard battery	kg		185		

Dimensional drawing

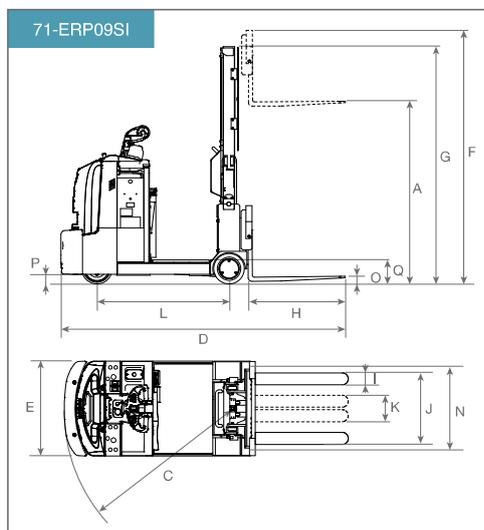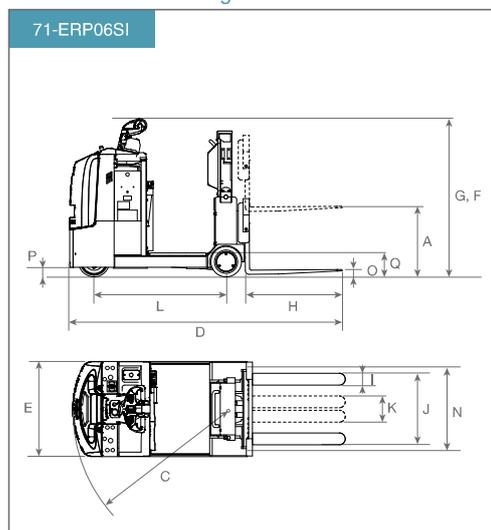

Load curve diagram

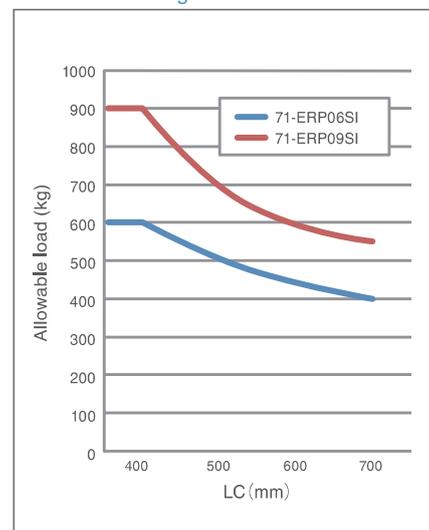

**SUMITOMO
NACCO FORKLIFT**

Sumitomo NACCO Forklift Co., Ltd.

2-75, Daito-cho, Obu, Aichi, 474-8555, Japan
TEL 0562 (48) 5251 FAX 0562 (48) 5396
<http://www.sumitomonacco.co.jp>

- Contact Sumitomo Nacco Forklift sales distributors who could provide professional after-sales services.

* This specification and equipment are subject to change without notice.
* Photos in this catalog may differ slightly from actual colors due to the nature of ink.



ERP-01A